



K-Series
MOBILE ELEVATING WORK PLATFORM

XGA26K
XGA26K1



PT. HASTA KARYA ANANTA

SALES - RENTAL - SERVICE - SPAREPART - TRADE IN




www.lifterindo.com

Parameter


Item	Unit	XGA26K	XGA26K1
Dimension			
a.Overall length(stowed)	mm	11760	11760
Overall length(transportation)	mm	9900	9900
b.Overall width	mm	2490	2490
c.Overall height	mm	2950	2950
Platform dimension	mm	2400 × 900 × 1150	2400 × 900 × 1150
d.Wheelbase	mm	3000	3000
Max. working height	m	26.6	26.6
Max. platform height	m	24.6	24.6
Max. working range	m	19.5	19.5
Performance			
Max.load capacity	kg	256	150(Unrestricted) / 256(Restricted)
Primary boom luffing range	°	-1~ +70	-1~ +70
Telescopic boom luffing range	°	-35~ +68	-35~ +68
Turntable rotation angle	°	360 continuous	360 continuous
Tailswing of turntable (boom lift up)	mm	1330	1330
Platform rotation angle	°	160	160
Total weight	kg	18100	16500
Travel speed (stowed)	km/h	5	5
Travel speed (elevated/extended)	km/h	0.6	0.6
Min.turning radius (4WS)	m	< 4.4 (outside)	< 4.4 (outside)
Min.ground clearance	mm	380	380
Max.gradeability (counterweight upwards)	%	45% (24°)	45% (24°)
Power source			
Tire specification	/	18-625	18-625
Engine model	/	Yuchai YCF3065-T482 V2607-CR-TE5B-XCM-2S	Yuchai YCF3065-T482
Rated Power	kw(rpm)	48(2400) / 48(2400)	48(2400)
Hydraulic tank capacity	L	150	150
Fuel tank capacity	L	180	180
Hydraulic system capacity	L	300	300

Options

Half-height mesh platform / Anti-squeeze hand-assisted track of the platform / Aircraft protection device
Anti-falling assembly / Anti extrusion device / Tool tray / Working light

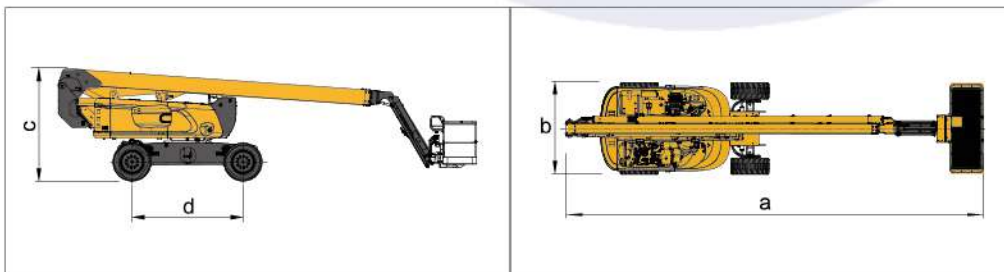

Work Curve Graph

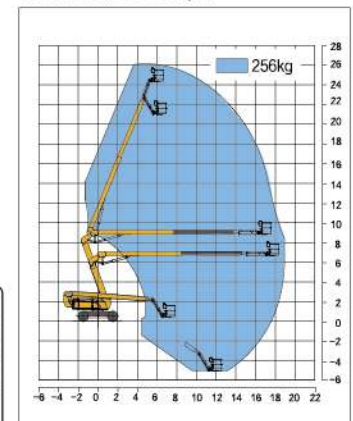

E-mail: rizky@hka.co.id
Hotline: +62 813 8335 4828

