



MOBILE ELEVATING WORK PLATFORM

**16** m  
Series

**XG1614HD**  
**XG1614HA**  
**XG1614AC**



**PT. HASTA KARYA ANANTA**

SALES - RENTAL - SERVICE - SPAREPART - TRADE IN




[www.lifterindo.com](http://www.lifterindo.com)



## Parameter

| Item                                          | Unit | XG1614HD                                                                                              | XG1614HA      | XG1614AC      |
|-----------------------------------------------|------|-------------------------------------------------------------------------------------------------------|---------------|---------------|
| <b>Dimension</b>                              |      |                                                                                                       |               |               |
| Max. working height                           | m    | 15.8                                                                                                  | 15.8          | 15.8          |
| Max. platform height                          | m    | 13.8                                                                                                  | 13.8          | 13.8          |
| Overall length a                              | mm   | 2840                                                                                                  | 2840          | 2840          |
| Overall length (without ladder)               | mm   | 2630                                                                                                  | 2630          | 2630          |
| Overall width b                               | mm   | 1390                                                                                                  | 1390          | 1390          |
| Overall height c                              | mm   | 2721                                                                                                  | 2721          | 2721          |
| Overall height (platform folded)              | mm   | 2175                                                                                                  | 2175          | 2175          |
| Platform dimension (length d * Width e)       | mm   | 2640 × 1120                                                                                           | 2640 × 1120   | 2640 × 1120   |
| Extended platform dimension                   | mm   | 900                                                                                                   | 900           | 900           |
| Min. ground clearance (elevated/stowed state) | mm   | 20 / 77.5                                                                                             | 20 / 77.5     | 20 / 77.5     |
| Tire                                          | mm   | 381 × 127                                                                                             | 381 × 127     | 381 × 127     |
| Wheelbase f                                   | mm   | 2240                                                                                                  | 2240          | 2240          |
| <b>Performance</b>                            |      |                                                                                                       |               |               |
| Max. number of occupants                      | /    | 2                                                                                                     | 2             | 2             |
| Work platform rated load                      | kg   | 350                                                                                                   | 350           | 350           |
| Extension platform rated load                 | kg   | 115                                                                                                   | 115           | 115           |
| Travel speed (lowered/elevated position)      | km/h | 3 / 0.8                                                                                               | 3 / 0.8       | 4 / 0.8       |
| Min. turning radius (inside/outside wheel)    | m    | 0 / 2.65                                                                                              | 0 / 2.65      | 0 / 2.65      |
| Work platform raising/lowering time           | s    | 65-82 / 61-80                                                                                         | 65-82 / 61-80 | 65-82 / 61-80 |
| Max. gradeability                             | %    | 25                                                                                                    | 25            | 25            |
| Tilt alarm angle (sideways/forward or back)   | °    | 1.5 / 3                                                                                               | 1.5 / 3       | 1.5 / 3       |
| Total weight                                  | kg   | 3680                                                                                                  | 3680          | 3680          |
| <b>Power source</b>                           |      |                                                                                                       |               |               |
| Battery                                       | /    | Maintenance free lead-acid battery                                                                    |               |               |
| Battery capacity                              | AH   | 280                                                                                                   |               |               |
| Options                                       |      | AC power to the platform<br>Air-line to platform<br>Platform working light<br>Weighing overload alarm |               |               |

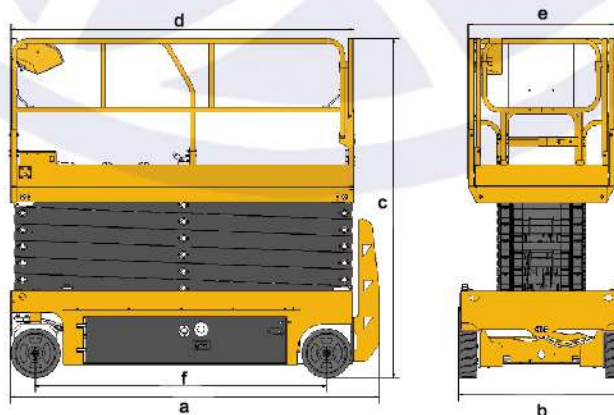

E-mail: [rizky@hka.co.id](mailto:rizky@hka.co.id)  
Hotline: +62 813 8335 4828

