




K-Series
MOBILE ELEVATING WORK PLATFORM

XGS20K



PT. HASTA KARYA ANANTA

SALES - RENTAL - SERVICE - SPAREPART - TRADE IN

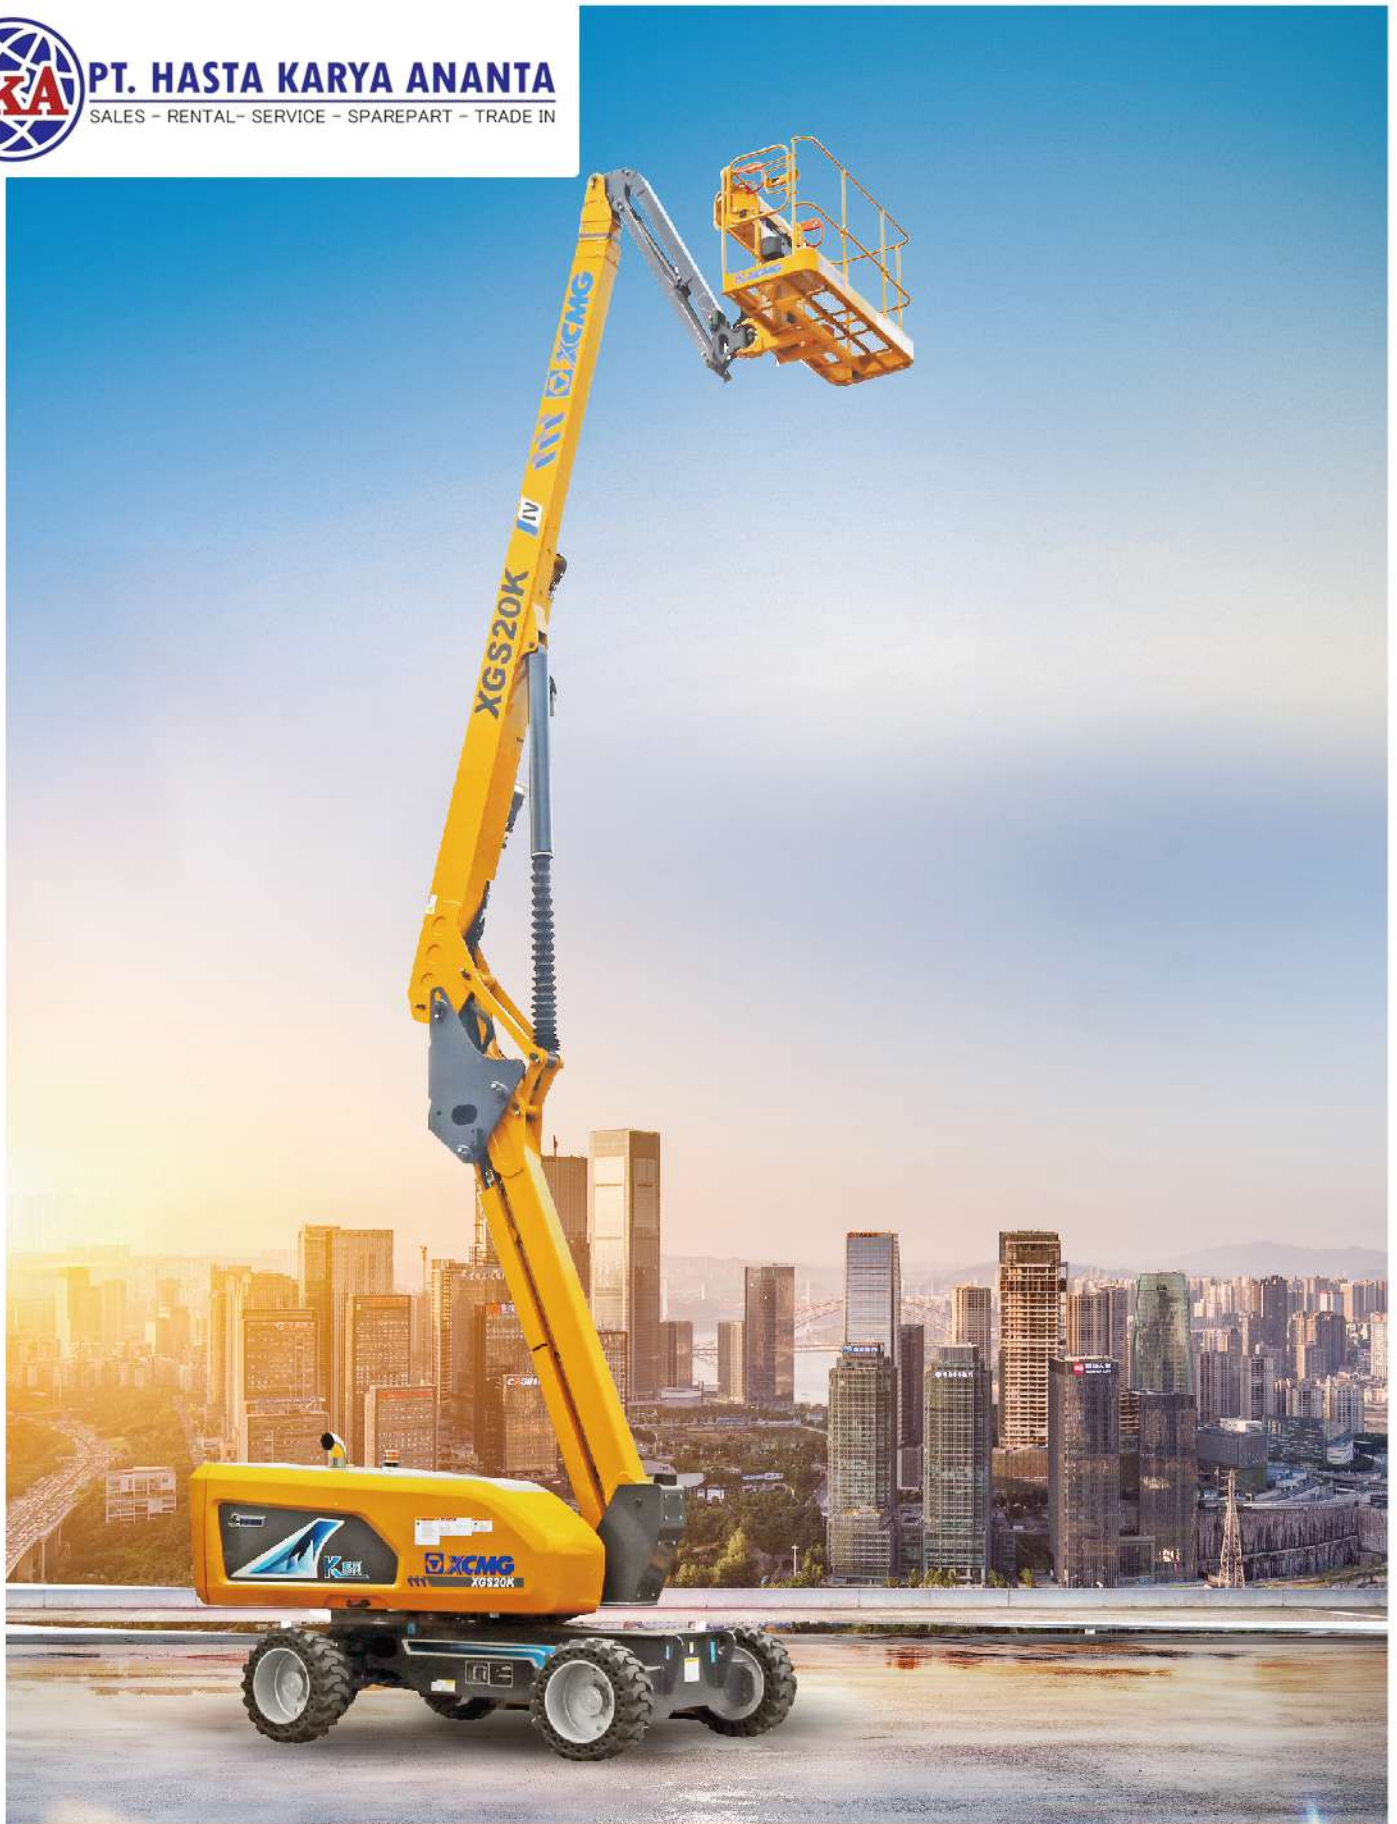




Parameter

Item	Unit	XGS20K
Dimension		
a. Overall length (stowed)	mm	9800
Overall length (transportation)	mm	7400
b. Overall width	mm	2490
c. Overall height	mm	2640
Platform dimension	mm	1830 × 760 × 1150
d. Wheelbase	mm	2500
Max. working height	mm	20500
Max. platform height	mm	18500
Max. working range	mm	13200
Performance		
Max. load capacity	kg	300
Walking speed (stowed)	km/h	4.8
Walking speed (elevated/extended)	km/h	0.6
Boom luffing range	°	-5~ 76
Rotation angle of turntable	°	360 continuous
Tailswing	mm	1630
Rotation angle of platform	°	160
Min. turning radius (outside)	mm	5000
Min. turning radius (inside)	mm	3500
Overall weight	kg	8500
Max. gradeability (counterweight upwards)	%	45
Max. gradeability (counterweight downwards)	%	25
Power source		
Engine model	/	Yuchai YCF3050-T423/ Kubota V2403-M-DI-E3B
Rated power	kW	36.8
Hydraulic tank capacity	L	120
Hydraulic system capacity	L	240
Fuel tank capacity	L	90

Options

Tool tray / Working light

Work Curve Graph

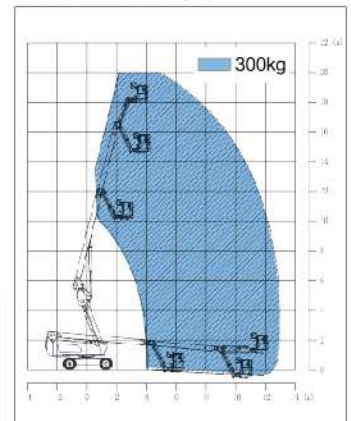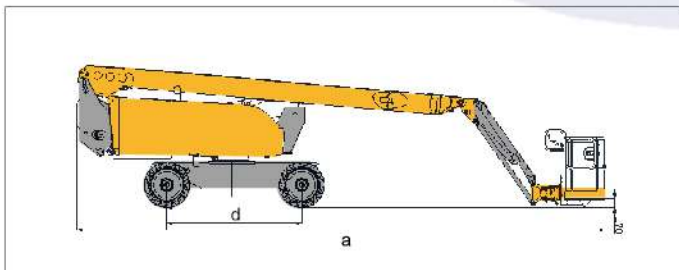

E-mail: rizky@hka.co.id
Hotline: +62 813 8335 4828

