



K-Series
MOBILE ELEVATING WORK PLATFORM

XGS32K



PT. HASTA KARYA ANANTA

SALES - RENTAL - SERVICE - SPAREPART - TRADE IN





Parameter


Item	Unit	XGS32K
Dimension		
a.Overall length (stowed)	mm	13100
Overall length (transportation)	mm	13100
b.Overall width	mm	2490
c.Overall height	mm	2980
Platform dimension	mm	2400 × 900 × 1150
d.Wheelbase	mm	3000
Max. working height	mm	32600
Max. platform height	mm	30600
Max. working range	mm	20000
Performance		
Max.load capacity	kg	300 (Unrestricted) / 460 (Restricted)
Walking speed (stowed)	km/h	5.5
Walking speed (elevated/extended)	km/h	0.6
Boom luffing range	°	-4 ~ +73
Rotation angle of turntable	°	360
Tailswing	mm	2030
Rotation angle of platform	°	160
Min. turning radius (outside)	m	6.25
Min. turning radius (inside)	m	4.4
Overall weight	kg	18500
Max. gradeability (counterweight upwards)	%	45% (24°)
Max. gradeability (counterweight downwards)	%	35% (21°)
Power source		
Engine model	/	YCF3065-T482 / YCF3050-T423 / YCF3065-T302
Rated power	kW (r/min)	48kw(2400r/min) / 36.8kw(2400r/min) / 48kw(2400r/min)
Hydraulic tank capacity	L	210
Hydraulic system capacity	L	350
Fuel tank capacity	L	180

Options

Anti extrusion device / Tool tray / Working light / Anti-squeeze hand-assisted track of the platform
Half-height mesh platform / Aircraft protection device / Anti-falling assembly

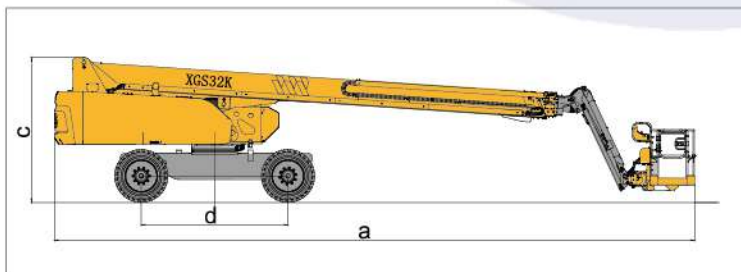

Work Curve Graph

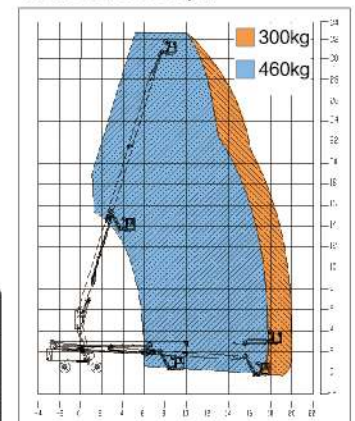

E-mail: rizky@hka.co.id
Hotline: +62 813 8335 4828

